


MIL-C-76 MWP Nylon Unshielded
MIL-C-76 MWP Nylon Unshielded
MIL Spec Wire

MIL-C-76 MWP Cable (Nylon Unshielded) Construction:

Conductor: Stranded Tinned Copper
Insulation: Polyvinyl Chloride (PVC)
Jacket: Nylon

MIL-C-76 MWP Cable (Nylon Unshielded) Ratings:

Voltage Rating: 1,000 volts
Temperature Rating: -55° C to +90° C

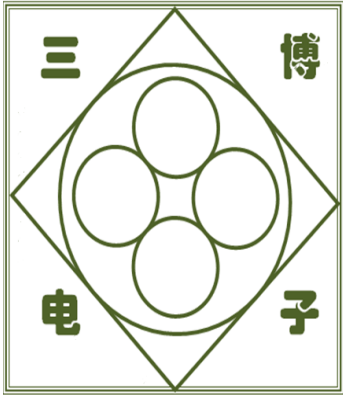

Part Number	AWG Size	Nom. O.D. (in)	Conductor Stranding	Nom. Dia. of Cond.	Nom. Insul. Thick. (in)	Jacket Thick	Mil-Spec #
M76-MWP-24-N	24	0.062	7/32	0.024	0.160	0.003	M76MWPC247B
M76-MWP-22-N	22	0.068	7/30	0.030	0.160	0.003	M76MWPC227B
M76-MWP-20-N	20	0.075	10/30	0.037	0.160	0.003	M76MWPC2010B
M76-MWP-18-N	18	0.083	16/30	0.045	0.160	0.003	M76MWPC1816B
M76-MWP-16-N	16	0.096	19/29	0.056	0.160	0.004	M76MWPC1619B
M76-MWP-14-N	14	0.111	19/27	0.071	0.160	0.004	M76MWPC1419B
M76-MWP-12-N	12	0.132	19/25	0.090	0.160	0.005	M76MWPC1219B